


JEET[®]

PUMPS | PIPES | CABLES

“Quality is everything we do”

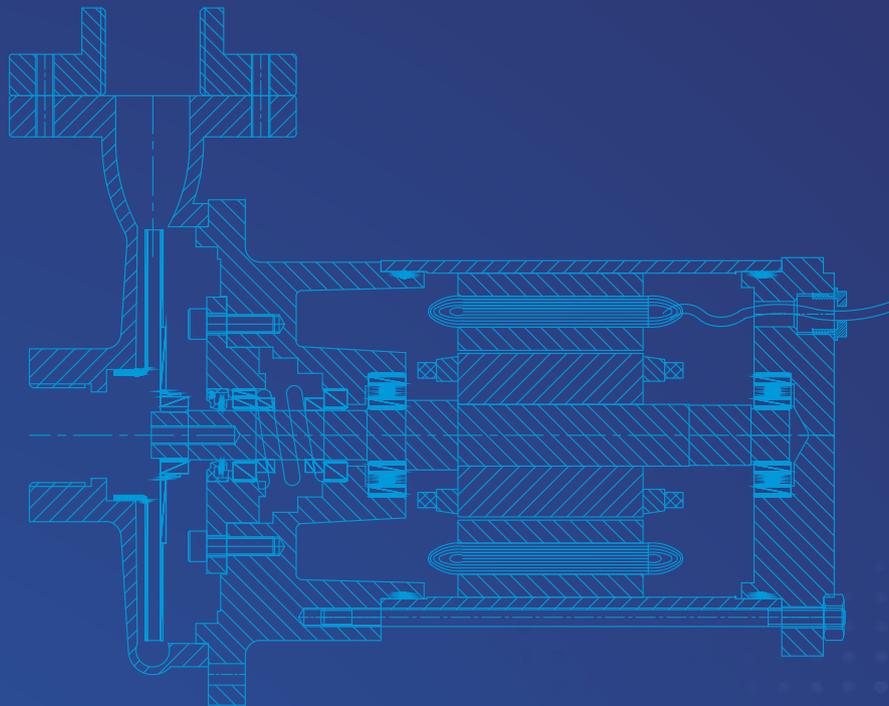

ULTRA
Power
SAVER

NEXT GENERATION SUBMERSIBLE PUMPS
For Water & Waste Water

JEET[®]

PUMPS | PIPES | CABLES


“Quality is everything we do”

SUBMERSIBLE OPENWELL PUMPS

SPECIFICATION

MOTOR TYPE	DRY
COPPER	SUPER ENAMELED (POLYESTER BASE)
INSULATION	CLASS-F
STAMPPING	CRNO
ROTOR	ALUMINUM
SHAFT	STAINLESS STEEL (410/431)
IMPELLER	ENCLOSED S.S. / GREY IRON
BODY	STAINLESS STEEL / MS FORGED
MECHANICAL SEAL	DUAL CARBON CERAMIC
BEARINGS	DUAL BALL TYPE BEARING (ZZ/2RS)
O-RINGS	NBR-70
CABLE	PVC NBR
CABLE GLAND	FORGED BRASS
ALL FASTENERS	S.S.
CASHING / HOUSING / BACK COVER	GREY IRON
THERMAL OVERLOAD PROTECTIION	7 AM 140°C (IN SINGLE PHASE PUMPS)

* MOC SHOWING MAJOR PARTS ONLY.

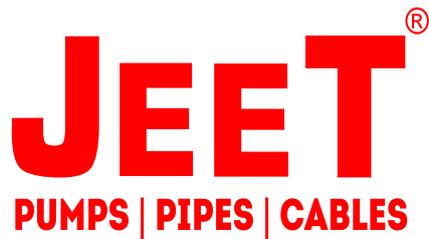

“Quality is everything we do”

DEWATERING PUMP FEATURES


Top Discharge, Flow-Thru Design

- This design Provides maximum motor cooling efficiency allowing continuous operation at low water levels and extended dry run capability



Unique Bottom Suction Mechanism

- Heavy strainer design gives more durability and save pump from jamming big particles inside.

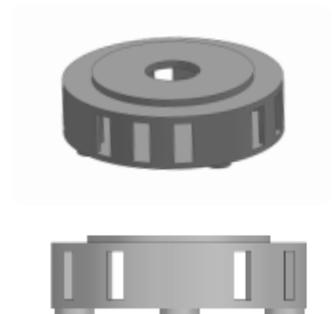

Impellers

- Hydro - dynamically well balanced dual blade semi open non clogging type
- It gives good solid handling capacity, Maximum free passage gives maintenance free operation
- Able to pump Some high viscosity materials



JEET[®]

PUMPS | PIPES | CABLES

“Quality is everything we do”

SUBMERSIBLE DEWATERING PUMP

SPECIFICATION

MOTOR TYPE	DRY
COPPER	SUPER ENAMELED (POLYESTER BASE)
INSULATION	CLASS-F
STAMPPING	CRNO
ROTOR	ALUMINUM
SHAFT	STAINLESS STEEL (410/431)
IMPELLER	SEMI OPEN NON CLOG
INNER BODY / OUTER BODY	STAINLESS STEEL
MECHANICAL SEAL	DUAL CARBON CERAMIC
BEARINGS	DUAL BALL TYPE BEARING (ZZ/2RS)
O-RINGS	NBR-70
CABLE	PVC NBR
DUAL CABLE GLAND	FORGED BRASS
ALL FASTENERS	S.S.
CASHING / HOUSING / BACK COVER	GREY IRON
THERMAL OVERLOAD PROTECTIION	7 AM 140°C (IN SINGLE PHASE PUMPS)
HOOK	DUAL MS FORGED

* MOC SHOWING MAJOR PARTS ONLY.

JEET[®]

PUMPS | PIPES | CABLES

"Quality is everything we do"



DEWATERING PUMP

MODEL	S20
HP / KW	1 / 0.75
PHASE	1 PH & 3 PH
RPM	2880
DUTY	S1
VOLTAGE	1PH : 220V ± 5% 3PH : 440V ± 5%
FREQUENCY	50 Hz
DISCHARGE	40mm
WEIGHT	22 Kg.
STARTING METHOD	1PH : DIRECT 3PH : D.O.L.
SERVICE CABLE	1 PH : 1mm x 2 core 3 PH : 1mm x 3 core
SOLID HANDLING	8mm

PERFORMANCE

HEAD IN METERS	0	4	6	8
LPM IN LITERS	250	220	160	80

INSTRUCTION :

1. Don't fill water inside pump
2. Use dry run protection stater



JEET[®]

PUMPS | PIPES | CABLES

"Quality is everything we do"



DEWATERING PUMP

MODEL	S21
HP / KW	2 / 1.5
PHASE	1 PH & 3 PH
RPM	2880
DUTY	S1
VOLTAGE	1PH : 220V ± 5% 3PH : 440V ± 5%
FREQUENCY	50 Hz
DISCHARGE	50mm
WEIGHT	35 Kg.
STARTING METHOD	1PH : DIRECT 3PH : D.O.L.
SERVICE CABLE	1 PH : 1.5mm x 2 core 3 PH : 1.5mm x 3 core
SOLID HANDLING	12mm

PERFORMANCE

HEAD IN METERS	0	4	6	8	10	12
LPM IN LITERS	450	400	340	280	175	70

INSTRUCTION :

1. Don't fill water inside pump
2. Use dry run protection stater



JEET[®]

PUMPS | PIPES | CABLES

"Quality is everything we do"



DEWATERING PUMP

MODEL	S22
HP / KW	3 / 2.2
PHASE	3 PH
RPM	2880
DUTY	S1
VOLTAGE	3PH : 440V ± 5%
FREQUENCY	50 Hz
DISCHARGE	75mm
WEIGHT	45 Kg.
STARTING METHOD	3PH : D.O.L.
SERVICE CABLE	3 PH : 2.5mm x 3 core
SOLID HANDLING	15mm

PERFORMANCE

HEAD IN METERS	0	4	6	8	10	12	14	16
LPM IN LITERS	900	780	660	565	470	400	275	100

INSTRUCTION :

1. Don't fill water inside pump
2. Use dry run protection stater



ULTRA
Power
SAVER

JEET[®]

PUMPS | PIPES | CABLES

"Quality is everything we do"

DEWATERINGPUMP



MODEL	S23
HP / KW	5 / 3.7
PHASE	3 PH
RPM	2880
DUTY	S1
VOLTAGE	3PH : 440V ± 5%
FREQUENCY	50 Hz
DISCHARGE	75mm / 100mm
WEIGHT	50 Kg.
STARTING METHOD	3PH : D.O.L.
SERVICE CABLE	3 PH : 2.5mm x 3 core
SOLID HANDLING	15mm

PERFORMANCE

HEAD IN METERS	0	4	6	8	10	12	14	16	18
LPM IN LITERS	1200	1010	930	820	710	600	475	300	100

INSTRUCTION :

1. Don't fill water inside pump
2. Use dry run protection stater



JEET[®]

PUMPS | PIPES | CABLES

"Quality is everything we do"



DEWATERING PUMP

MODEL	S24
HP / KW	10 / 7.4
PHASE	3 PH
RPM	2880
DUTY	S1
VOLTAGE	3PH : 440V ± 5%
FREQUENCY	50 Hz
DISCHARGE	100mm / 150mm
WEIGHT	120 Kg.
STARTING METHOD	3PH : D.O.L.
SERVICE CABLE	3 PH : 4mm x 3 core
SOLID HANDLING	15mm

PERFORMANCE

HEAD IN METERS	0	4	6	8	10	12	14	16	18	20	22	24	28
LPM IN LITERS	2400	2000	1800	1700	1500	1400	1200	1140	1050	950	835	650	400

INSTRUCTION :

1. Don't fill water inside pump
2. Use dry run protection stater



JEET[®]

PUMPS | PIPES | CABLES

“Quality is everything we do”

Domestic Home & Buildings

Industrial

Drainage Application

Agriculture Export

Water & Waste Water

Research

Since 1999



JEET PUMPS PVT. LTD.

Kuvadwa GIDC, Plot No. 311/312, Rajkot - Ahmedabad Highway, Kuvadwa Rajkot - 360023