

2.0 HP/1.5 Kw V-5 PLUS SERIES (SINGLE PHASE)

SUBMERSIBLE PUMP SET (Suitable For 115mm (5") Bore well)

Approx Performance Chart at , 2800 Rpm, 180 To 220V(SP), 50Hz Ac supply.

2.0HP V-5 (SP) Virgin Bowl-Impeller With SS Neckring-30 Ft


SINGLE PHASE MODEL NO.	MOTOR HP	PUMP STAGE	Outlet (mm)/Inch	Head In METER & Discharge in LPM						
				METER /LPM	METER /LPM	METER /LPM	METER /LPM			
JJ210SPV5	2.0	10	50/2"	90/30	75/70	60/90	40/110			
JJ28SPV5	2.0	8	50/2"	72/45	60/90	48/105	32/135			
JJ27SPV5	2.0	7	50/2"	63/62	52/105	42/128	28/148			
JJ25SPV5	2.0	5	50/2"	45/75	38/135	30/160	20/195			

2.0HP V-5 (SP) Radial Flow CI Bowl & SS Impeller-35 Ft

SINGLE PHASE MODEL NO.	MOTOR HP	PUMP STAGE	Outlet (mm)/Inch	Head In METER & Discharge in LPM						
				METER /LPM	METER /LPM	METER /LPM	METER /LPM			
JRF25SPV5	2.0	5	50/2"	45/40	42/85	37/120	30/155			
JRF24SPV5	2.0	4	50/2"	36/50	34/120	30/190	24/240			
JRF23SPV5	2.0	3	50/2"	27/60	25/150	22/240	18/290			

2.0HP V-5 (SP) Mixed Flow CI Bowl & SS Impeller-35 Ft

SINGLE PHASE MODEL NO.	MOTOR HP	PUMP STAGE	Outlet (mm)/Inch	Head In METER & Discharge in LPM						
				METER /LPM	METER /LPM	METER /LPM	METER /LPM			
JMF22SPV5	2.0	2	65 / 2.5"	18/100	17/210	14/380	10/530			

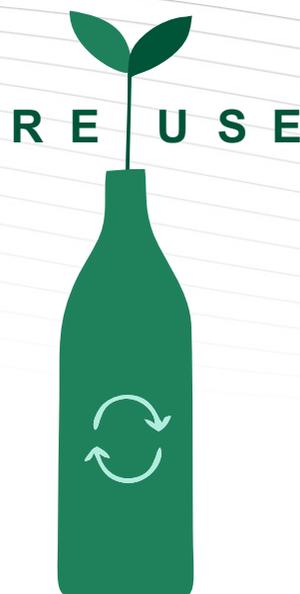

Note: Performance may vary depending upon voltage, frequency and field condition.



3.0 HP/2.2 Kw V-5 PLUS SERIES (SINGLE PHASE)

SUBMERSIBLE PUMP SET (Suitable For 115mm (5") Bore well)

Approx Performance Chart at , 2800 Rpm, 180 To 220V(SP), 50Hz Ac supply.

3.0HP V-5 (SP)

Virgin Bowl-Impeller With SS Neckring-30 Ft

SINGLE PHASE MODEL NO.	MOTOR HP	PUMP STAGE	Outlet (mm)/Inch	Head In METER & Discharge in LPM			
				METER /LPM	METER /LPM	METER /LPM	METER /LPM
JJ320SPV5	3.0	20	50/2"	180/25	150/45	120/60	80/80
JJ314SPV5	3.0	14	50/2"	125/45	99/90	105/98	56/130
JJ311SPV5	3.0	11	50/2"	99/62	82/105	66/128	44/150
JJ38SPV5	3.0	8	50/2"	72/75	60/135	48/160	32/195

3.0HP V-5 (SP)

Radial Flow CI Bowl & SS Impeller-35 Ft

SINGLE PHASE MODEL NO.	MOTOR HP	PUMP STAGE	Outlet (mm)/Inch	Head In METER & Discharge in LPM			
				METER /LPM	METER /LPM	METER /LPM	METER /LPM
JRF39SPV5	3.0	9	50/2"	80/30	72/60	63/100	54/125
JRF37SPV5	3.0	7	50/2"	63/40	59/85	52/120	42/155
JRF36SPV5	3.0	6	50/2"	54/50	51/120	45/160	36/200
JRF35SPV5	3.0	5	50/2"	45/60	42/150	37/185	30/240
JRF34SPV5	3.0	4	50/2"	36/80	34/185	30/240	24/285
JRF33SPV5	3.0	3	50/2"	27/105	25/240	22/315	18/360

3.0HP V-5 (SP)

Mixed Flow CI Bowl & SS Impeller-35 Ft

SINGLE PHASE MODEL NO.	MOTOR HP	PUMP STAGE	Outlet (mm)/Inch	Head In METER & Discharge in LPM			
				METER /LPM	METER /LPM	METER /LPM	METER /LPM
JMF34SPV5	3.0	4	65 / 2.5"	36/80	33/180	28/320	20/440
JMF33SPV5	3.0	3	65 / 2.5"	27/100	25/210	21/380	15/530
JMF32SPV5	3.0	2	65 / 2.5"	18/150	17/410	14/610	10/640

SAVE WATER

the future is in your hands



5.0 HP/3.7 Kw V-5 PLUS SERIES (SINGLE PHASE)

SUBMERSIBLE PUMP SET (Suitable For 115mm (5") Bore well)

Approx Performance Chart at , 2800 Rpm,180 To 220V(SP), 50Hz Ac supply.

5.0HP V-5 (SP) Virgin Bowl-Impeller With SS Neckring-30 Ft

SINGLE PHASE MODEL NO.	MOTOR HP	PUMP STAGE	Outlet (mm)/Inch	Head In METER & Discharge in LPM			
				METER /LPM	METER /LPM	METER /LPM	METER /LPM
JJ532SPV5	5.0	32	50/2"	285/25	240/44	192/60	128/75
JJ522SPV5	5.0	22	50/2"	198/30	165/70	132/90	88/110
JJ518SPV5	5.0	18	50/2"	162/65	135/92	108/102	72/138
JJ514SPV5	5.0	14	50/2"	126/75	105/132	84/162	56/202

5.0HP V-5 (SP) Radial Flow CI Bowl & SS Impeller-32 Ft

SINGLE PHASE MODEL NO.	MOTOR HP	PUMP STAGE	Outlet (mm)/Inch	Head In METER & Discharge in LPM			
				METER /LPM	METER /LPM	METER /LPM	METER /LPM
JRF512SPV5	5.0	12	50/2"	108/40	102/85	90/120	72/155
JRF510SPV5	5.0	10	50/2"	90/50	85/120	75/160	60/210
JRF58SPV5	5.0	8	50/2"	72/60	68/150	60/190	48/247
JRF56SPV5	5.0	6	50/2"	54/80	51/190	45/245	36/290
JRF55SPV5	5.0	5	50/2"	45/100	42/220	37/330	30/380

5.0HP V-5 (SP) Mixed Flow CI Bowl & SS Impeller-32 Ft

SINGLE PHASE MODEL NO.	MOTOR HP	PUMP STAGE	Outlet (mm)/Inch	Head In METER & Discharge in LPM			
				METER /LPM	METER /LPM	METER /LPM	METER /LPM
JMF56SPV5	5.0	6	65 / 2.5"	54/80	50/100	42/320	30/440
JMF55SPV5	5.0	5	65 / 2.5"	45/100	42/210	35/380	25/540
JMF54SPV5	5.0	4	65 / 2.5"	36/125	30/250	28/440	20/610



One Second Can **CHANGE** Your **LIFE**



Note: Performance may vary depending upon voltage, frequency and field condition.